

icore

Innovation to the Core



iPulse

2 channel strobe controller

iCore Smart LED Strobe Controller

Features

- Powerful Overdrive
- LED protection when Over-driving
- Sequence mode for multi-strobing
- Constant current drive
- Fast reaction speed $< 0.5\mu s$
- Flash duration $< 0.5\mu s$
- Auto voltage for flexible power supply


Benefits

- Guarantee constant current & brightness
- Providing brighter images at high magnification
- Freezing motion at flying inspection
- Multi-strobing at line scan & area scan
- Increasing life-span of LED from strobing & protection tech
- Fast and accurate pulsing to reduce blurred image

Specifications

Model	IP-2P2S-20A	IP-2P2S-50A	IP-2P2S-2C	IP-2P2S-5C
Interface	RS-485 & RS-232			
Drive method	Constant current			
No. of channel	2			
Min. Pulse width	0.5μs			
Max. Switching freq.	300KHz			
Max. Voltage output	80V	48V	80V	48V
Max. Current output (Continuous/Pulse)	2A / 20A	5A / 50A	2A / 2A	5A / 5A
Max. Power (Continuous/Pulse)	60W / 1500W	125W / 2000W	60W / 160W	125W / 250W
Application	Area & Line scan	Area & Line scan	Line scan	Line scan

Interface Pin-map.

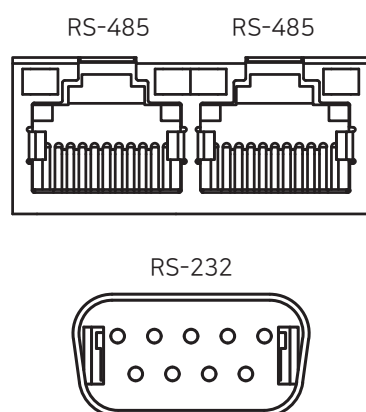

RS-485 PORT PIN CONFIGURATION		
3	RS485 Data(A)+	Non-inverting receiver input & driver output
6	RS485 Data(B)-	Inverting receiver input & driver output
4	Trigger Input -	Trigger input RJ45 Port -
5	Trigger Input +	Trigger input RJ45 Port +
7,8	GND	Ground

RS-232 PORT PIN CONFIGURATION		
2	RXD	Receive Data
3	TXD	Transmit Data
5	GND	Ground

Mechanical Dimensions

