


# PCIe-GIE72/74

## 2/4CH PCI Express® GigE Vision PoE+ Frame Grabbers with PoE Power Management and Protection

### Features

- PCI Express® x4 compliant
- Support for 2/4 independent Gigabit Ethernet ports
- IEEE 802.3at for PoE+ (Power over Ethernet Plus)
- PoE protection and automated power budget control for enhanced asset protection
- Easy-to-use utility and API provided for PoE power management
- Multiple cards, multiple cameras, in a single system
- Wide operating temperature range from 0°C to +70°C, supporting non-drop frame capture in extreme environments
- Up to 20/60/120W PoE power from PCIe bus/4-pin/6-pin Molex connector
- Powered Device (PD) auto detection and classification
- IEEE 1588 (PTP technology, hardware only)

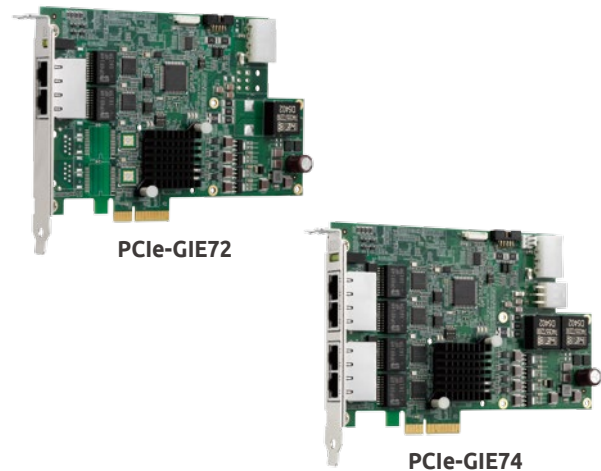

### Introduction

ADLINK's PCIe-GIE72/74 is PCI Express® x4 lane, GigE Vision PoE+ (Power Over Ethernet Plus) frame grabber supports 2/4CH independent Gigabit Ethernet ports for multiple GigE Vision device connections with data transfer up to 1 Gb/s per port. PoE+ technology provides up to 30W PoE power and automatic detection for stable and reliable connection between PoE+, PoE or non-PoE cameras and frame grabbers, reducing costs, simplifying installation, and easing maintenance burdens with excellent asset protection.

#### **Machine vision superiority with guaranteed non-drop frame grabs**

Any number of PCIe-GIE7x series cards can be installed in a single system without occupying any BIOS I/O resources, enabling multi-card single-system non-drop machine vision frame grabs. range supports integration with fanless computer for IA applications in harsh environments.

#### **Exclusive Comprehensive PoE Protection Secures Assets**

Exclusive comprehensive PoE Protection design protects card and camera from overcurrent and overvoltage events. Automated power budget control adjusts PoE port power supply automatically, avoiding equipment damage.

#### **Smart PoE management**

Easy-to-use utility and API provide real-time PoE status monitoring and control, lowering maintenance costs and predicting possible failure in advance, while PoE power priority selection and PoE-based power on/off support more demanding applications.

### Software Support

- **OS Information**  
Windows® 7/8.1/10
- **Software Compatibility**  
C#/.NET/VC++/VB/C++ Builder/Delphi

### Ordering Information

- **PCIe-GIE72**  
2-CH PCI Express® power over Ethernet frame grabber
- **PCIe-GIE74**  
4-CH PCI Express® power over Ethernet frame grabber

### Optional Accessories

- **PCIe-GIE72/4 I/O bracket**  
2/4 Trigger In

## Specifications

Model Name	PCIe-GIE74	PCIe-GIE72
Form Factor	PCI Express® x4	
Ethernet Port	4 fully-integrated Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.	2 fully-integrated Gigabit Ethernet Media Access Control (MAC) and physical layer (PHY) ports.
	PoE+ (Power over Ethernet Plus), IEEE 802.3at compliant, supporting 0, 1, 2, 3, and 4, providing up to 30W	
	9 kB jumbo frame support	
Functions	PoE Power Management	
	Link Aggregation, IEEE 1588 (PTP technology)	
	Multiple cards and multiple cameras	
Operating Environment	60W PoE: 0°C to +70°C (32°F to 150°F)	
	Humidity: 5% to 90% RHNC	
Power Requirements	+3.3V max @ 3A <sup>(1)(2)(3)</sup>	+3.3V max @ 2.5A <sup>(1)(3)</sup>
Dimensions	167.6 mm x 106.6 mm (6.6" x 4.2") (W x L)	167.6 mm x 106.6 mm (6.6" x 4.2") (W x L)

**Note:**

- (1) Max 61.6W PoE power w/ ether 4-pin (+12V@6A) or 6-pin (+12V@6A) Molex connector.
- (2) Max 120W PoE power w/ both 4-pin (+12V@6A) and 6-pin (+12V@6A) Molex connector.
- (3) Max 20W PoE power w/ PCIe slot (+12V@2.1A).