


RoHS

| | |
|-------------|--------------------|
| DATE : | May/16/13' |
| CMS P/N : | B0106445 |
| Dwg No: | A07200 |
| CUST. P/N : | USB3C-A/1-CS/1-C-0 |
| CUSTOMER : | |
| DESCRIPTION | USB3C-A/1-CS/1-C-0 |
| APPROVE: | |

| REV. | DATE | DESCRIPTION | BY |
|------|------------|-------------|-----|
| 1.0 | May/16/13' | D2839 | Eve |
| | | | |
| | | | |

CONFIGURATION

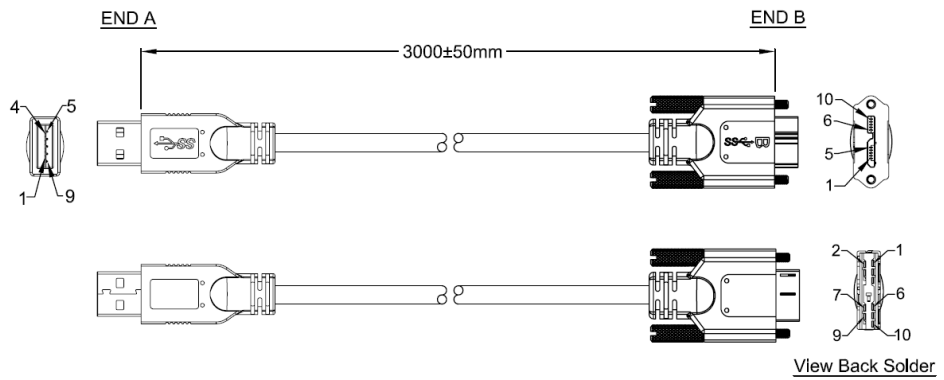

SPECIFICATION OF MATERIAL

- END A**

CONT. PLATING: Gold 15u" MOLD No. CMS-USB40 SHIELD'G: -

CONNECTOR TYPE: USB-9MASS15NBU T. SCREW: -
- END B**

CONT. PLATING: Gold 15u" MOLD No. CMS-USB41 SHIELD'G: -


CONNECTOR TYPE: USB-10MDSS15NB T. SCREW: Jack Screw M2 Size :4.00x33.00x7.00
- WIRES**

WIRE GAUGE: 28Awg&28Awg&24Awg LENGTH: 3000+30-0mm SHIELD'G: AB

CONDUCTORS: (1TP+MAE)x2+(1TP+AL)+2C COLOR: Blue (301U) UL/CSA: UL2725 (USB3.0)

JACKET MAT'L: PVC INS. MAT'L: FM-SKIN-PE&FM-PE&SR-PVC WIRE O.D.: 5.5mm

4. CONNECTOR PIN OUT

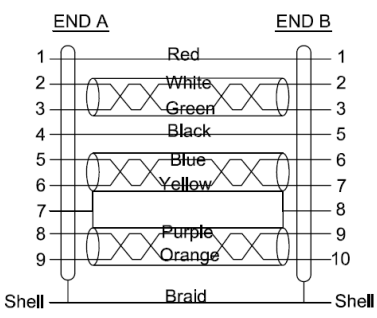

5. SPECIAL REQUIREMENTS

- Product requirement for Green environment protection:RoHS.
- Overmold PVC is 45P Blue (Pantone No.:301U)(RoHS).

*** Standard Product**